

Vacuum pump VRP-15D



Flow	420 l/min / 15 CFM
Vacuum Level	0,067 Pa / 5 mikronów
Motor Power	0,55 kW (0,75 KM)
Compression Stages	2
Power Supply	230 V
Frequency	50 - 60 Hz
Power Cord Length	200 cm
Motor Speed at 50 Hz	2700 rpm
Noise Level	63 dB
Inlet Connection	1/4", 3/8", 1/2"SAE
Oil Capacity	0,88 l
Oil Type	mineral, viscosity: 46 mm²/s
Dimensions	414 x 152 x 310 mm
Weight	15,0 kg
Protection Class	IP44

Vacuum pump VRP-15D

Operating Temperature	-1 - 40°C
Storage Temperature	-1 - 40°C
Minimum Oil Temperature for Startup	-1°C
Shut-Off Valve	yes
Exhaust Plug Thread	M33 x 1,5 mm
Vacuum Gauge	no
Packaging	cardboard box

Pictures of some products may vary. Every effort has been made to ensure that the information contained in this catalog is correct. Due to constant technological development, we reserve the right to make changes without notice.

Vacuum pump VRP-15D

Dual-stage vacuum pump VRP-15D VALUE designed for refrigerants from HFC and HFO groups (ex.: R32).

Main features:

- dual-stage

- designed for large commercial refrigeration systems and extensive air conditioning systems

- large and clear oil inspection eyelet


- DC motor

- built-in solenoid valve that maintains the vacuum and prevents oil from flowing back into the system

- high efficiency oil mist filter

- non-sparking design, suitable for R32

- gas ballast valve – prevents moisture from entering the pump oil

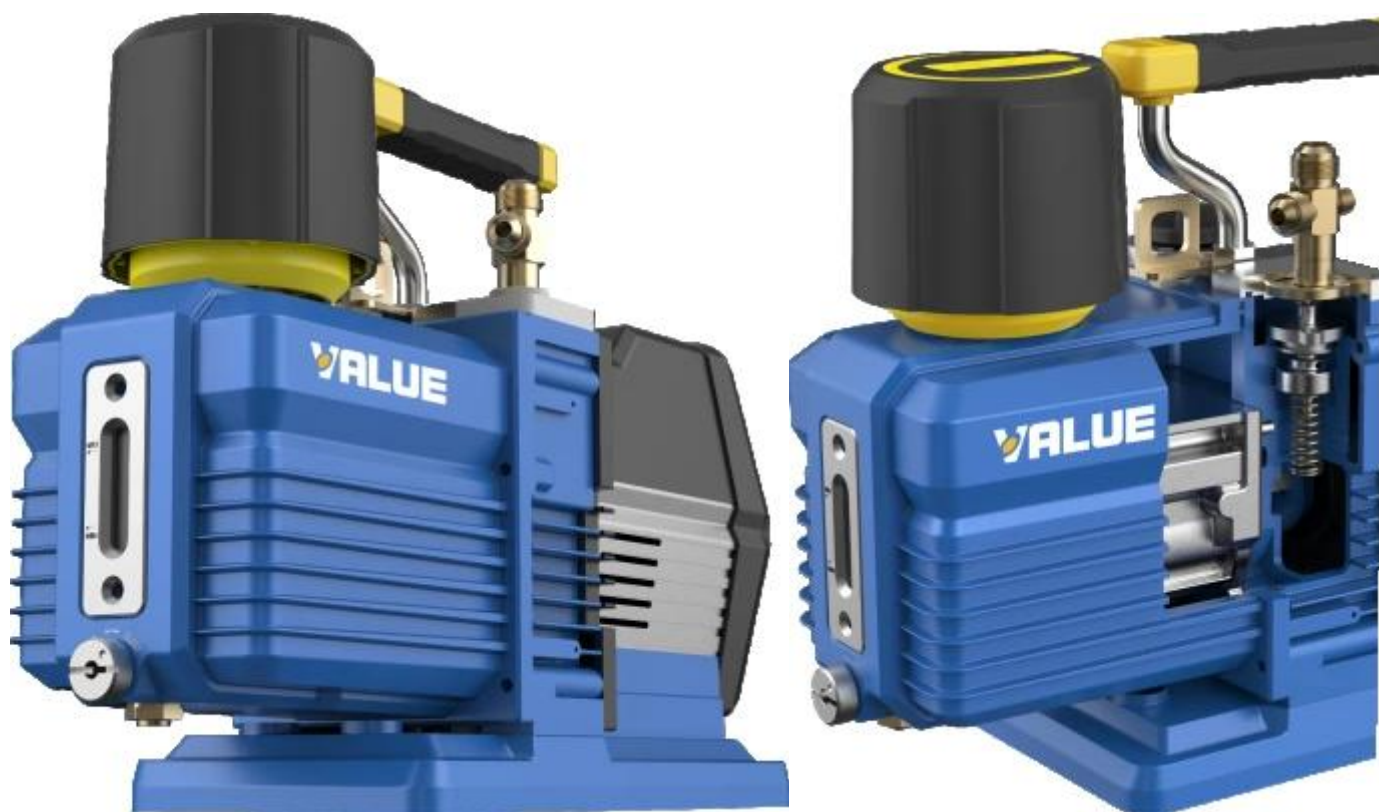

Vacuum pump VRP-15D

